

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

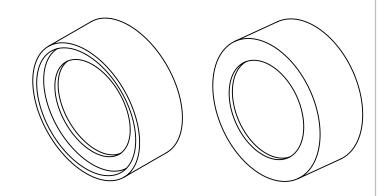


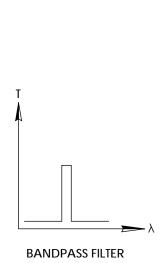


REV. 001

DURABILITY

ENVIRONMENTAL

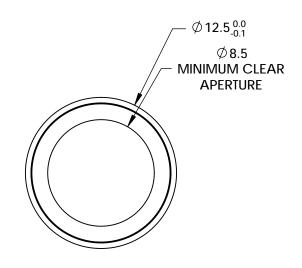



CENTER WAVELENGTH (CWL)	620 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED

VALUE

MIL-C-48497A, SECT. 3.4.1

MIL-STD-801F, SECT. 507.4

Edmund Optics®

			Edmund Optics			
<u>G</u>	THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TITLE	OD4, Ø12.5mm, 620nm x 10nm, HC, BP	FILTER	
	ALL DIMS IN	mm	DWG NO	65104	SHEET 1 OF 1	

DIMENSIONS ARE FOR REFERENCE ONLY

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE