


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

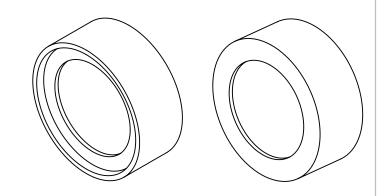



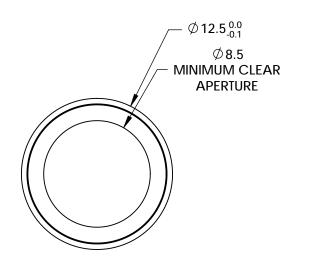

-	5.00±0.10

R	ΔΙ	NΙ	\Box	D	Δ	SS	FΙΙ	T	FΕ)
D.	м	v		_,	-	. ว. ว	ГΗ	- 11	ГГ	

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	852 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			Edmund Optic	;S®
THIRD ANGLE - PROJECTION		TITLE	OD4, Ø12.5mm, 852nm x 10nm, HC, BP	FILTER
ALL DIMS IN	mm	DWG NO	65120	SHEET 1 OF 1