
NOTES:

- 1. SUBSTRATE MATERIAL: OPTICAL GRADE GERMANIUM
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 WITHIN 1 ARCMIN
- 3. COATING(APPLY ACROSS CLEAR APERTURE) S1 & S2: R(AVG) < 3% FROM 3.0 TO 5.0 μm
- 4. FINE GROUND SURFACE
- 5. PROTECTIVE BEVEL AS NEEDED

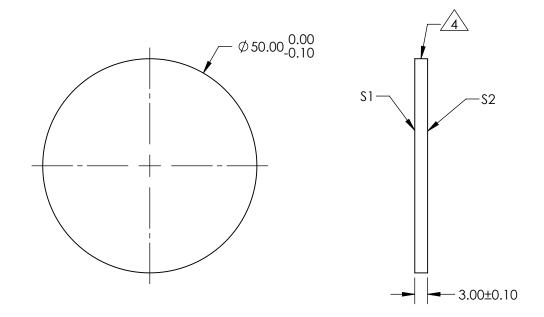

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	5
DIMENSIONS ARE FOR REFERENCE ONLY	

							Ontice	
	S1	S2				Edmund Optic	5	
SHAPE	PLANO	PLANO				50mm Dia. x 3.0mm Thick 3-5µm AR Coo	atina	
SURFACE ACCURACY AT 10.6µm (P-V)	1/10 WAVE	1/10 WAVE			TITLE	Ge Window	TAR Couling,	
SURFACE QUALITY	60 - 40	60 - 40					CUEFT	
MIN CLEAR APERTURE	Ø45.0	Ø 45.0	ALL DIMS IN	mm	DWG NO	89570	Sheet 1 Of 1	