



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

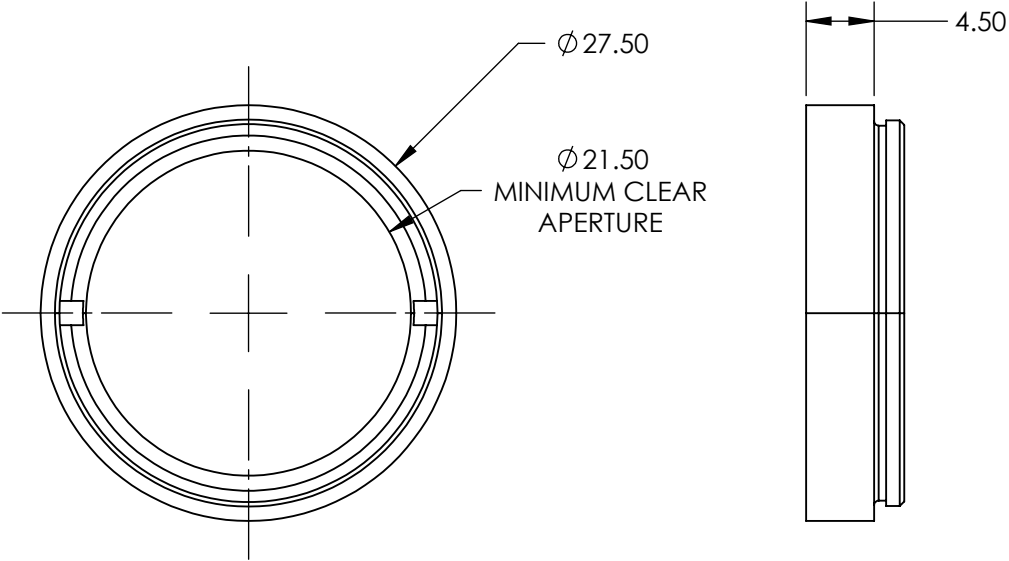


IMAGING FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	518 $\pm$ 2nm
FULL WIDTH HALF MAX (FWHM)	95 $\pm$ 2nm
AVERAGE TRANSMISSION (%)	$\geq 90$
BLOCKING	200 - 1000
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**Edmund Optics®**

THIRD ANGLE PROJECTION 		TITLE	CYAN M25.5 X 0.50 IMAGING FILTER	
ALL DIMS IN	mm	DWG NO	89774	SHEET 1 OF 1