
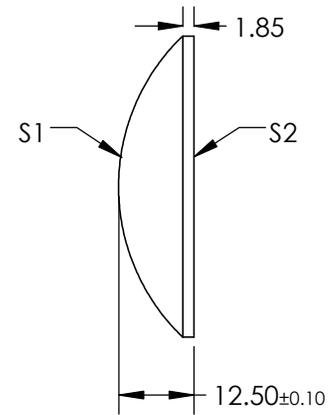



NOTES:

1. SUBSTRATE: VACUUM UV GRADE CaF<sub>2</sub>
2. COATING
  - S1: NONE
  - S2: NONE
3. CENTERING: <3 arcmin
4. RoHS: COMPLIANT

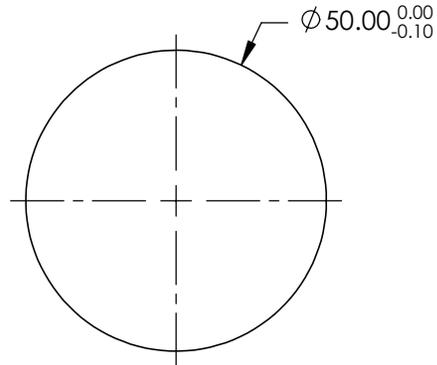

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                 |                      |                      |  |  |   |  |
|-----------------|----------------------|----------------------|--|--|---|--|
|                 | S1                   | S2                   | EFL @ 266nm: 75  |  |  <b>Edmund Optics®</b> |  |
| SHAPE           | CONVEX               | PLANO                | BFL @ 266nm: 66.45   |  |   |  |
| RADIUS          | 34.7mm               | ∞                    | THIRD ANGLE PROJECTION  |  | TITLE   | 50mm DIA. X 75mm FL CALCIUM FLUORIDE<br>PCX LENS |
| SURFACE QUALITY | 40-20                | 40-20                |  |  | ALL DIMS IN   | mm   |
| CLEAR APERTURE  | >90%                 | >90%                 |  |  |   | SHEET<br>1 OF 1                                  |
| BEVEL           | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |  |  |   |  |