

NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)




S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

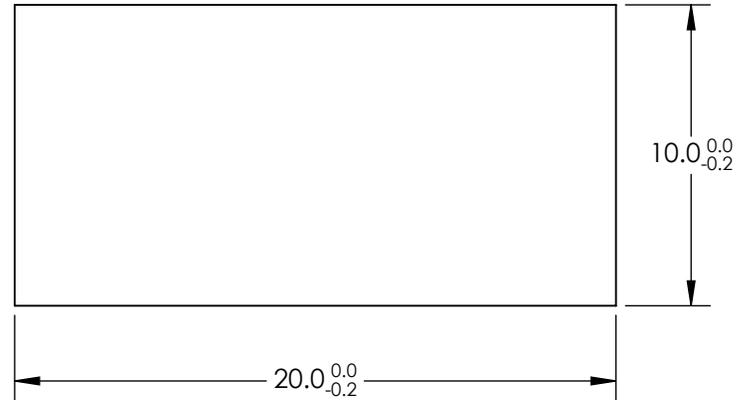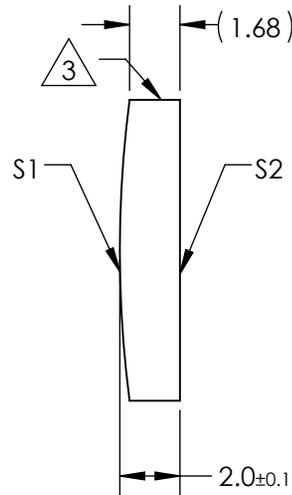

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	75	 <b>Edmund Optics®</b>		
SHAPE	CONVEX	PLANO	BFL	73.72			
RADIUS	38.72	∞	THIRD ANGLE PROJECTION 		TITLE	10mm H X 20mmL X 75mm FL MgF2 COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	47774	SHEET 1 OF 1
CLEAR APERTURE	9.00 X 19.00	9.00 X 19.00					
COATING APERTURE	9.00 X 19.00	9.00 X 19.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					