

NOTES:



1. SUBSTRATE MATERIAL:  
N-SF11
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: MgF2



R(avg) ≤1.75% @ 400 - 700nm

3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY  
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

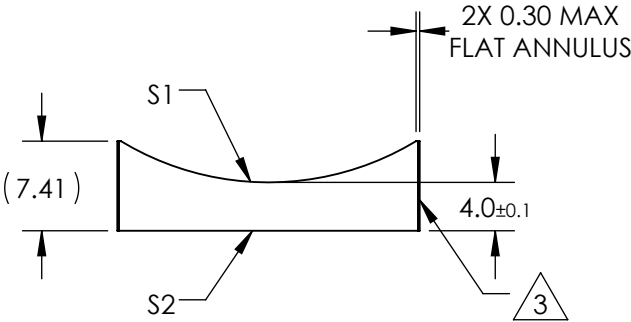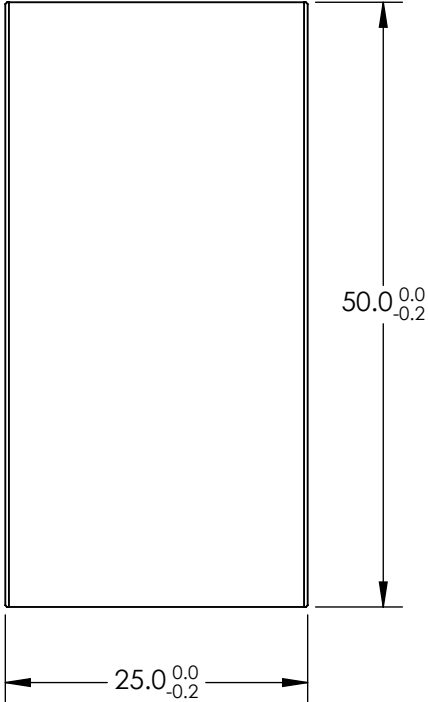

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	<div><div>EFL</div><div>-30</div></div> <div><div>BFL</div><div>-32.24</div></div> <div><div> Edmund Optics®</div></div>				
SHAPE	CONVEX	PLANO					
RADIUS	-23.54	∞					
SURFACE QUALITY	60-40	60-40	<div><div>THIRD ANGLE PROJECTION</div><div></div></div> <div><div>TITLE</div><div>25mm H X 50mm L X -30mm FL MgF2 COATED, CYLINDER LENS</div></div>				
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00					
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	68079	SHEET 1 OF 1