
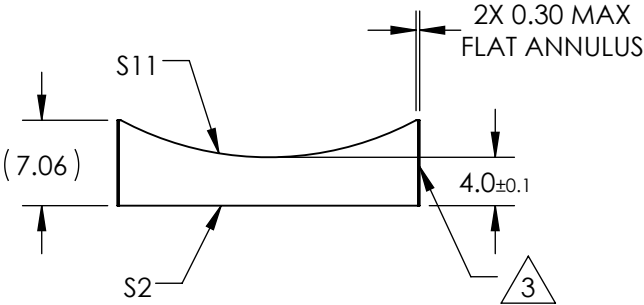


NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)
- S1 & S2: MgF2
- R(avg) $\leq 1.75\%$ @ 400 - 700nm



3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

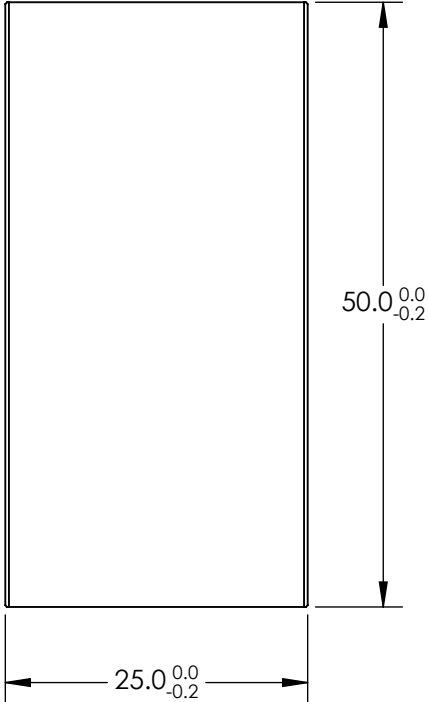

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®					
SHAPE	CONVEX	PLANO					EFL	-50
RADIUS	-25.8	∞					BFL	-52.6
SURFACE QUALITY	60-40	60-40			TITLE	25mm H X 50mm L X -50mm FL MgF2 COATED, CYLINDER LENS		
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00						
COATING APERTURE	24.00 X 49.00	24.00 X 49.00						
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	68081	SHEET 1 OF 1	