



NOTES:

- COATING (APPLY ACROSS CLEAR APERTURE)
 LASER V-COAT
 R(ABS) ≤ 0.25% @ 355nm
- 2. RoHS: COMPLIANT



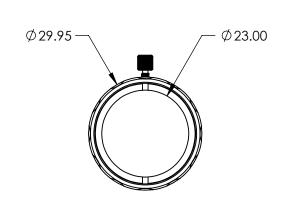

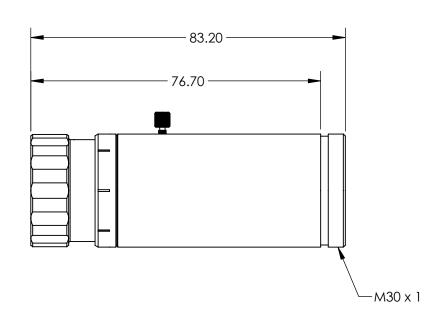

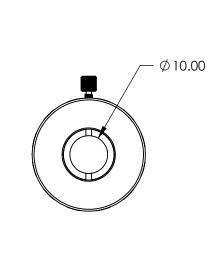

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		_
DAMAGE THRESHOLD (PULSED)	2.5J/cm² @ 10ns, 20Hz, 355nm	
DESIGN WAVELENGTH DWL (nm)	355	1
expansion power	3X	1
transmission (%)	> 99 (NOMINAL)	
NOMINAL PERFORMANCE	<λ/10 FOR 4mm INPUT BEAM (NOMINAL)	
		_

				B Eamuna Optic	;S [®]
	THIRD ANGLE PROJECTION	\$	TITLE	3X, 355nm VEGA™ Nd:YAG LASER LINE EXPANDER	BEAM
)	ALL DIMS IN	mm	DWG NO	35097	SHEET 1 OF 1