
## NOTES:


- 1. SUBSTRATE MATERIAL: ALUMINUM
- 2. FINISH (EXCEPT SURFACE S1): BLACK ANODIZED
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
  \$1: PROTECTED ALUMINUM
  R(AVG) >85% from 0.4-0.7µm
  R(AVG) >97% from 2 12µm


SURFACE ROUGHNESS: <100 Å RMS

- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

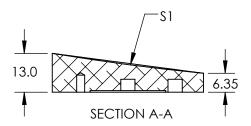

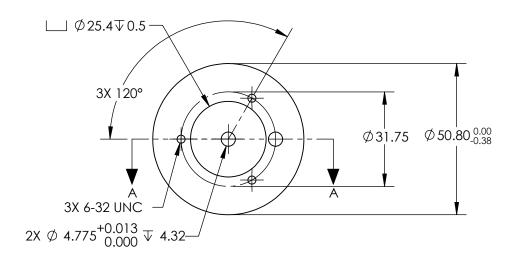

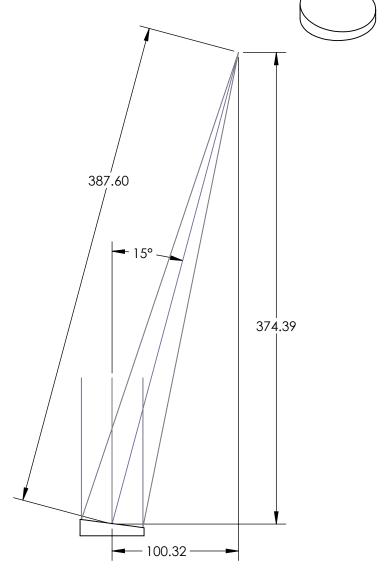

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| REV. A  | \$1                  | EFL                         | 387.6      |        | <b>Edmund Optics</b> ®                |
|---|----------------------|-----------------------------|------------|--------|---------------------------------------|
| SHAPE   | PARABOLIC            | PFL                         | 381        |        |                                       |
| REFLECTIVE WAVEFRONT<br>DISTORTION AT 632.8nm (RMS) | 1λ                   |                             |            |        | Ø50.8 X 387.6mm EFL 15° OAP PROTECTED |
| SURFACE FIGURE AT 632.8nm (RMS)                     | λ/2                  | THIRD ANGLE .<br>PROJECTION | $\bigcirc$ | TITLE  | ALUMINUM MIRROR 100Å                  |
| CLEAR APERTURE                                      | 90%                  |                             | <br>       |        |                                       |
| BEVEL   | PROTECTIVE AS NEEDED | ALL DIMS IN                 | mm         | DWG NO | 35594 SHEET 1 OF 1                    |