

## NOTES:

- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 5° 09' NOMINAL BLAZE WAVELENGTH: 300nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



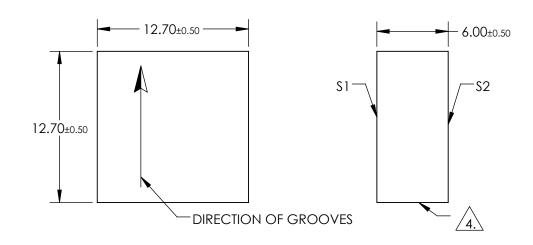

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

|                | \$1           | \$2           |  |  |  |  |
|----------------|---------------|---------------|--|--|--|--|
| SHAPE          | PLANO         | PLANO         |  |  |  |  |
| CLEAR APERTURE | 11.43 x 11.43 | 11.43 x 11.43 |  |  |  |  |

**Edmund Optics**®

| THIRD ANGLE PROJECTION |    | TITLE  | GRATING DIFF 600GR 300nm 12.7 x 1 | 2.7             |
|------------------------|----|--------|-----------------------------------|-----------------|
| ALL DIMS IN            | mm | DWG NO | 43741                             | SHEET<br>1 OF 1 |