
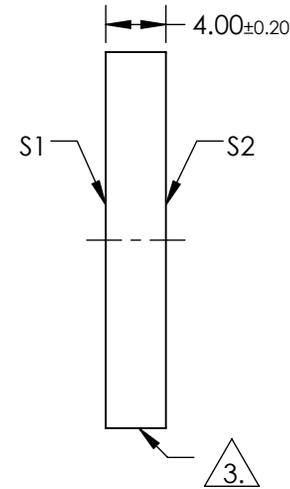


NOTES:

1. SUBSTRATE:  
FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE):  
 S1: R(AVG) ≥ 98% @ 340-488nm @ 0° AOI  
 R(AVG) ≥ 98% @ 320-450nm @ 45° AOI FOR ALL POLARIZATION  
 R(AVG) ≥ 98% @ 320-450nm @ 45° FOR S-POLARIZATION  
 S2: NONE


3. FINE GRIND SURFACE

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

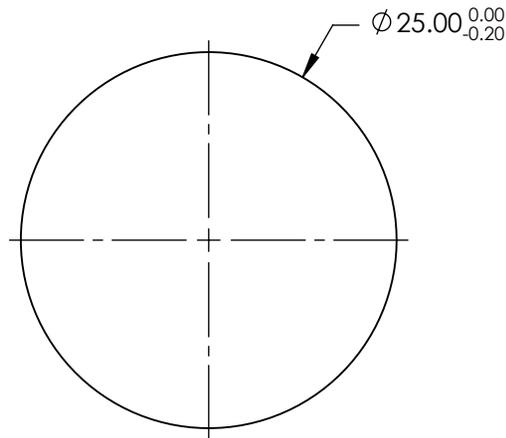

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE	> 90	N/A
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	$\lambda/10$	N/A
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

**EO**® **Edmund Optics**®

TITLE:  $\text{Ø}25\text{mm}$ , 320 - 450nm BROADBAND  $\lambda/10$  MIRROR

DWG NO: 37564

SHEET 1 OF 1