


NOTES:

- 1. SUBSTRATE:  
FUSED SILICA
- 2. S2 TO BE PARALLEL TO S1 TO WITHIN <3ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)  
S1: EN AL  
R(AVG) >95% from 450-650nm

S2: NONE



4. FINE GROUND SURFACE

- 5. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACE
- 6. SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 7. ROHS: COMPLIANT

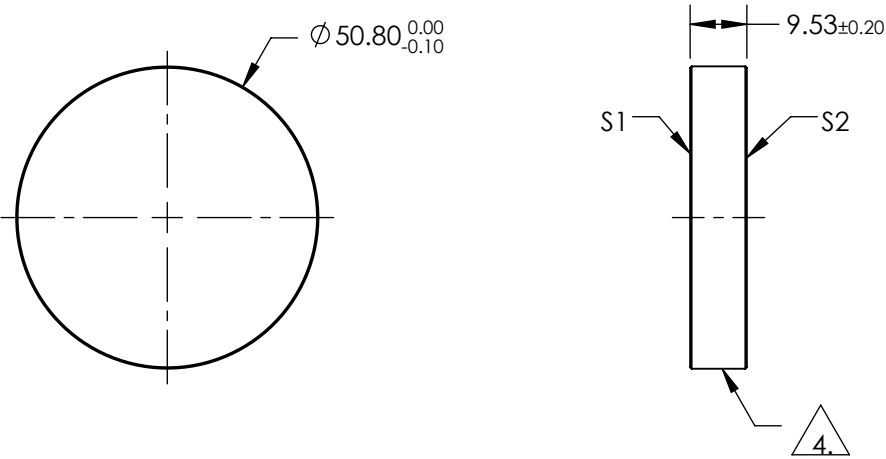

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2				
SHAPE	PLANO	PLANO	 Edmund Optics®			
SURFACE QUALITY	20-10	COMMERCIAL POLISH				
SURFACE FLATNESS	0.10 WAVE	N/A		TITLE		
CLEAR APERTURE	Ø45.72	N/A		MIRROR FS 1/10 WAVE EN AL 50.8 DIA		
COATING APERTURE	Ø49.80	N/A				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	39224
					SHEET 1 OF 1	