
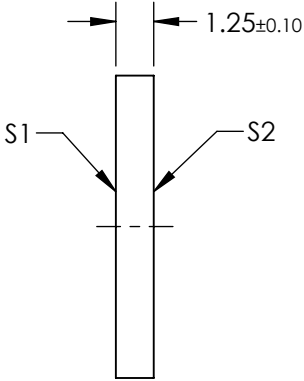




NOTES:

- 1. SUBSTRATE:  
FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <5 ARCSEC
- 3. COATING (APPLY ACROSS COATING APERTURE):  
S1 & S2: NIR II (750-1550nm)  
R(ABS) ≤1.5% @ 750 - 800nm  
R(ABS) ≤1.0% @ 800 - 1550nm  
R(AVG) ≤0.7% @ 750 - 1550nm
- 4. WAVELENGTH RANGE: 750 - 1550nm

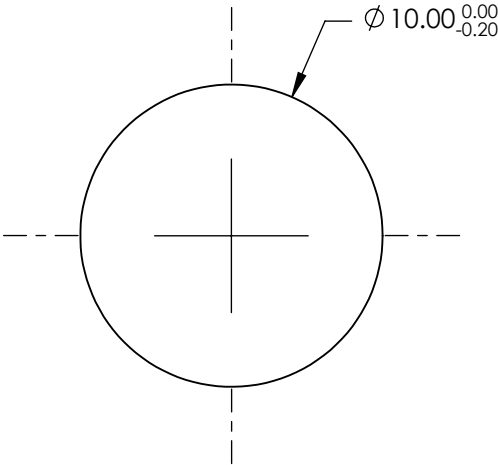

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO		TITLE	10mm Dia., 1.25mm Thick, NIR II Coated λ/10 Fused Silica Window	
SURFACE QUALITY	20-10	20-10		DWG NO	11895	
TRANSMITTED WAVEFRONT (P-V)	0.10 WAVE	0.10 WAVE				
CLEAR APERTURE	Ø8.00	Ø8.00				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	SHEET 1 OF 1	