
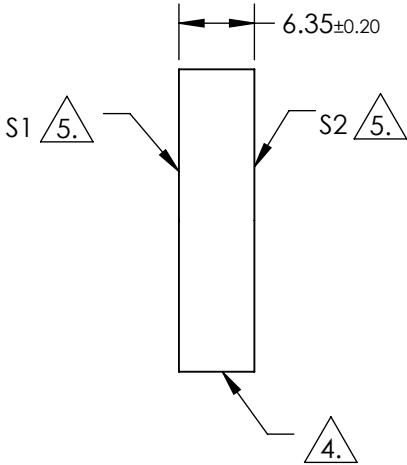


NOTES:



- 1. SUBSTRATE:  
FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN < 3 ARCMIN
- 3. COATING PERFORMANCES ACROSS CLEAR APERTURE:  
T(ABS) > 99.5% @ 355nm @ 0° AOI

- 4. FINE GRIND SURFACE
- 5. SURFACES ARE EXTREMELY FRAGILE, ANY CONTACT TO OPTICAL SURFACE WILL AFFECT PERFORMANCE. DO NOT TOUCH SURFACES AND DO NOT WIPE CLEAN.
- 6. UNTREATED ANNULUS 1.25mm FROM EDGE

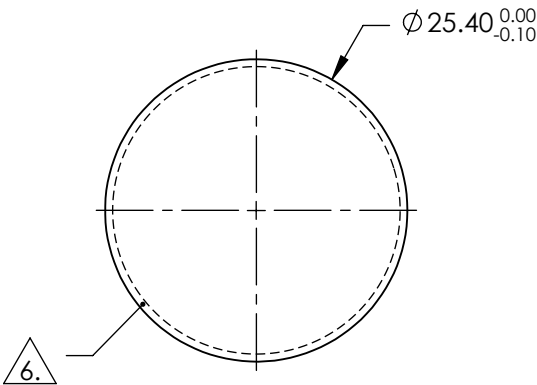

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®	
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 	TITLE	25.4mm Dia., 6.35mm THICK, 355nm NEBULAR™ LASER LINE WINDOW	
SURFACE QUALITY	10-5	10-5		DWG NO	14648	SHEET 1 OF 1
CLEAR APERTURE	Ø20.32	Ø20.32				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm		