

1. SUBSTRATE:  
FUSED SILICA

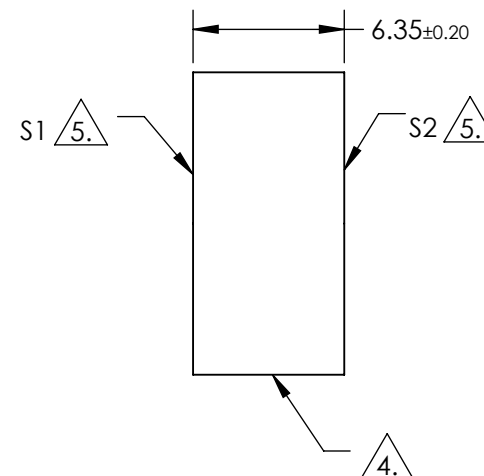
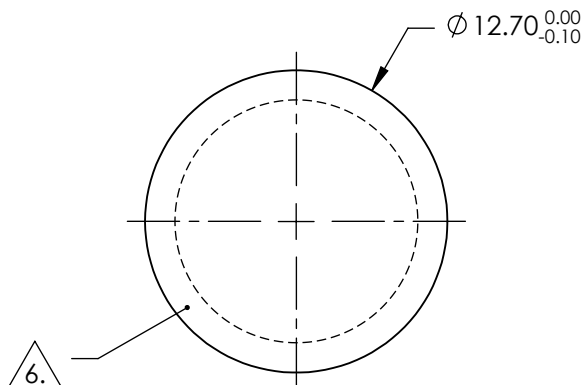
### 3. COATING PERFORMANCES ACROSS CLEAR APERTURE:

T(ABS) > 99.8% @ 1064nm @ 0° AOI

#### 4. FINE GRIND SURFACE



5. SURFACES ARE EXTREMELY FRAGILE, ANY CONTACT TO OPTICAL SURFACE WILL AFFECT PERFORMANCE. DO NOT TOUCH SURFACES AND DO NOT WIPE CLEAN.

△ 6. UNTREATED ANNULUS 1.25mm FROM EDGE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®		
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 	TITLE	12.7mm Dia., 6.35mm THICK, 1064nm NEBULAR™ LASER LINE WINDOW		
SURFACE QUALITY	10-5	10-5					
CLEAR APERTURE	Ø10.16	Ø10.16					
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	14672	SHEET 1 OF 1