## NOTES:


- SUBSTRATE: Polymer Film on TAC
- 2. COATING UNCOATED, PROTECTIVE FILM ON BOTH SIDES
- 3. POLARIZATION (%): 99.83 @ 400 760nm 99.63 @ 761 2200nm
- 4. TRANSMISSION (%): SINGLE:


29 @ 400 - 760nm 39 @ 761 - 2200nm

CROSSED: 0.02 @ 400 - 760nm 0.11 @ 761 - 2200nm

- 5. EXTINCTION RATIO: 400:1 (Average @ 800 2200nm)
- 6. WAVELENGTH RANGE: 400 2200 nm
- 7. POLARIZATION AXIS IS MARKED BY 0.5mm RADIUS CUTOUT

8. ROHS COMPLIANT

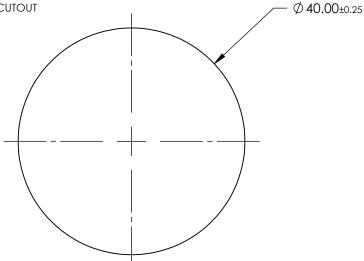

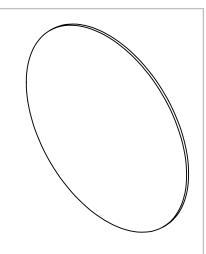

0.50±0.10

<b>Gamund</b> O	ptics®
-----------------	--------

FOR INFORMATION ONLY: SPECIFICATIONS SUBJECT TO PARTS TO THIS DRAWING REFERENCE ONLY

CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR

THIRD ANGLE PROJECTION	$\phi \Box$	TITLE	40mm DIA. NIR LINEAR POLARIZING FILM	
ALL DIMS IN	mm	DWG NO	18942	SHEET 1 OF 1