

NOTES:

1. SUBSTRATE:



H-K51

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: MgF2 (400-700nm)

R(AVG) ≤ 1.75% @ 400 - 700nm



3. CENTERING: ≤30 ARCMIN

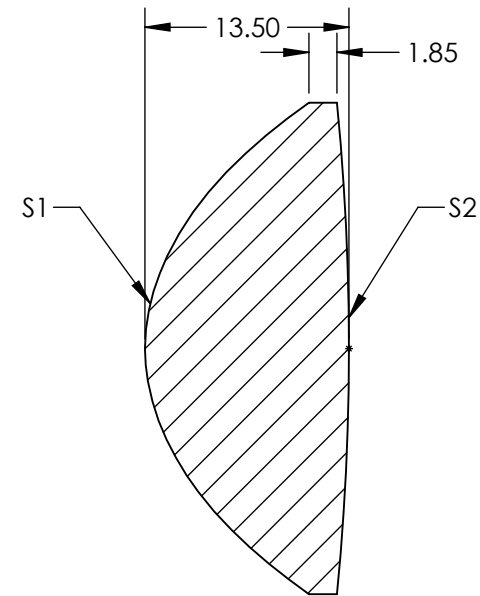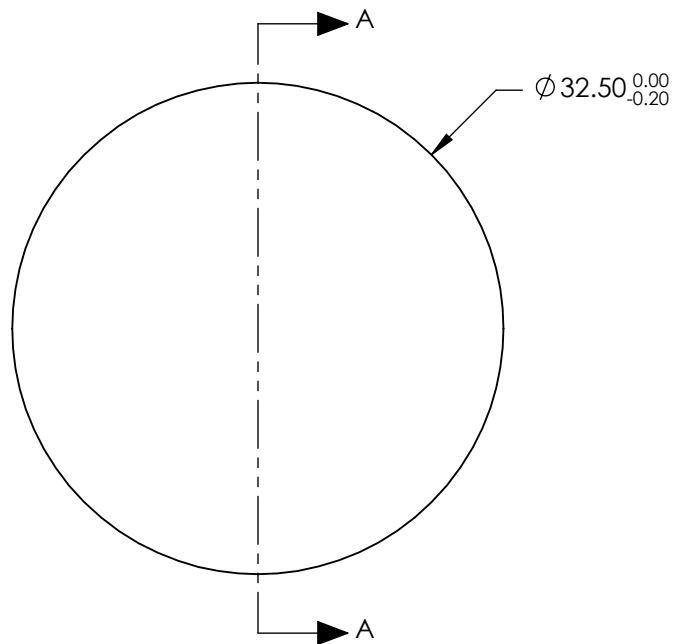

SECTION A-A

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL @ 587.6nm	23.50	 Edmund Optics®		
SHAPE	CONVEX	CONVEX	BFL @ 587.6nm	15			
SURFACE QUALITY	80-50 (typical)	80-50 (typical)	THIRD ANGLE PROJECTION 		TITLE	32.5mm Dia. x 23.5mm FL, MgF2 Coated, Aspheric Condenser Lens	
CLEAR APERTURE	$\phi 29.25$	$\phi 29.25$			DWG NO	21200	SHEET 1 OF 1
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm			